

TURLENS
Optics & Reflector

Turkey
Made in



Datasheet




LED 1w Power




Code : 10 D H 2 W

10⁰ Degree







LIGHTING PARAMETERS




Box Quantity : 100X8=800 PCS
Box Size : 24*24*15 cm
Box Total Kg +/-3: 3,63 Kg

PACKAGING

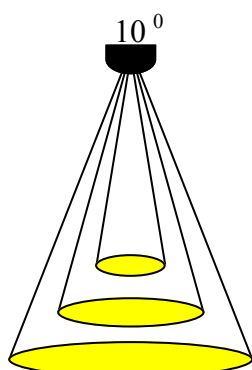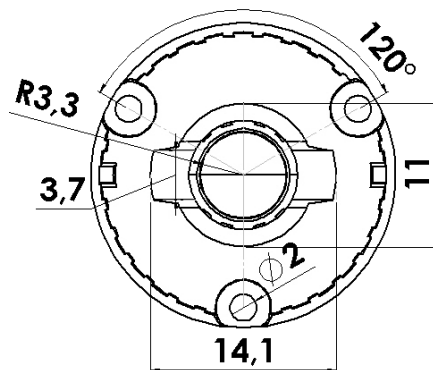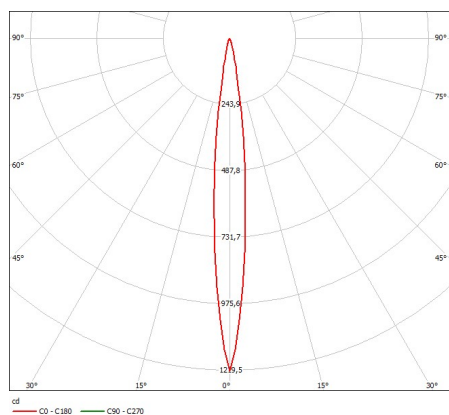

10 Degree
Light Dimansion Parameters

1m / Ø : 0,17 m
2m / Ø : 0,35 m
3m / Ø : 0,55 m

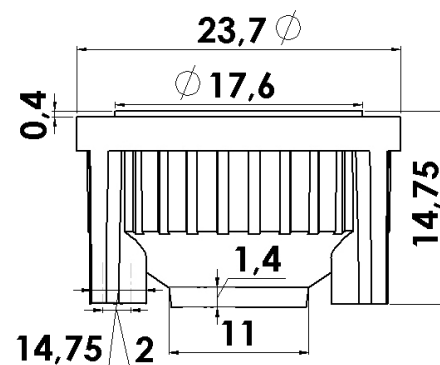

* Streets, Offices, Homes, Stages, Architectural, Down Light , & Decorative Lighting

- * Optical Grade PMMA / PC Best Available Optical Efficiency :
 > 90 % ,PMMA with UV Light Transmittance High Productivity with 2mm Thickness
- * Operating Temperature: -40°C ~ + 80°C (upper limit +90°C) PMMA
- * Operating Temperature: -40°C ~ + 90°C (upper limit +100°C) PC
- * Average transmittance in visible spectrum: 400nm~700nm> 90% - (3mm thick PMMA)

* Operating Temperature: -40°C ~ +110°C PC V2 & ROHS UV Resistant
Flammability Standard : V2 (burning stops within 30 seconds on a vertical specimen;
drips of flaming particles are allowed). High heat resistance

- * If adhesive is used, make sure that the adhesive is acid-free.
- * If you need to clean the lenses, use only mild soap and water. Use a very soft piece of cloth to dry.
- * Do not use any solvents on lenses
- * Our product is guaranteed against manufacturing defects only.
- * Do not store the product in a dusty & corrosive environment
- * Do not touch the optical portion of the lens with bare hands